


CR-15 Putting a New Spin on Productivity.



Multiply your Workforce with the CR-15 Large Area Topdresser & Material Handler

Our largest capacity product, the CR-15 combines unprecedented precision and productivity topdressing into one workhorse of a machine. It frees up your time and gives you confidence knowing you're meeting your agronomic goals. One season with the CR-15 and you'll wonder how you ever got by without it.

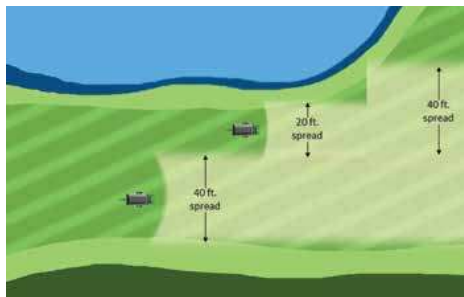

Easily adjust spread widths while keeping the same material rates, saving on material costs and labor.

Updated Controls for More Precision & Productivity

The CR-15 comes equipped with a digital smart controller that gives superintendents the ability to calculate their preferred rates then lock in rates and widths into eight savable presets. Operators can switch between presets on the fly for greater productivity.

The edge-to-edge spread capability offers a consistent application that's pinpoint accurate, eliminating waste. Miscalculating a spread by five feet off the fairways can add up to 4 hopper loads or more. Areas needing heavier applications like landing zones can be handled with the push of a button. Customize your rates by season and set different widths, but keep the same rate. Control the spinner, cross-conveyor, and belt speed from the seat.

Backed by a 3-year warranty, the CR-15 doubles as an all-purpose construction and renovation machine. Quickly load other topdressers, turf vehicles and spreaders or move around the course. Use it on a daily basis for everything from renovating bunkers and filling ditches to fixing washout areas.

Turfco CR-15 Applications

- Topdress fairways
- Load topdressers
- In-house construction
- Renovate bunkers
- Fill irrigation trenches
- Transfer material to hard-to-reach places
- Fix washout areas
- Rebuild tees



The swivel kit locks in any position or can be moved 180° by hand.

CR-15 Large Area Topdresser & Material Handler

Upgraded Smart Controller Delivers

- Lock in preferred rates and widths into eight savable presets
- Switch between presets on the go, never leaving the seat
- Instantly adjust to heavier rates for landing zones or drainage areas
- Switch from narrow to wide widths while maintaining the same rate
- Input square footage and desired rate to calculate material amount
- Controller covered under 3-Year Warranty
- Now you can input your speeds into the rate calculator for greater accuracy



Unload 4-cubic-yards in as little as 30 seconds.



Bring your CR-15 on the course for easy and efficient topdresser loading.



Cross conveyor with 180° swivel action allows you to place material right where you want it.

Unique Design Features

- Dual-beam suspension and lower center of gravity for more stability.
- 'Fast Attach' System: No tools for connecting attachments.
- Unique frame design keeps tongue weight consistent with shifting loads and provides greater clearance for attachments. No need to lift rear of unit to transport.
- Rear end raises up to 6-ft-quiicker loading of other vehicles and carriers.
- Low profile, light PSI for easy handling of large volumes.
- Self-cleaning hopper keeps wide range of material flowing freely.



Light, medium and heavy spreads from 15 to 45 ft wide with WideSpin technology.

Specifications

Model	CR-15 (#85442 without brakes) (#85443 with surge brakes)
Drive	Tractor's hydraulic system powers belt and attachments
Hopper Capacity	4 yd ³ (3.06 m ³)
Hopper	Galvanized steel panels
Transport Speed	Up to 15 MPH (24 km/h) empty Up to 8 MPH (12.8 km/h) loaded
Topdressing Speed	Up to 6 MPH (9.6 km/h)
Conveyor Belt	32" (0.81 m) wide, pebble grain surface with heavy-duty polyester cord
Metering Gate	Full manual adjustment with the ability to fully open entire rear hopper panel
Smart Control	3-position switch; 8 programmable presets; onboard rate calculator; instantaneous belt and spinner speed control
Wheels & Tires	Four 31" x 15.5"-15" turf tires
Hitch	Heavy-duty, adjustable height pin hitch
Tractor Requirements	Minimum of 40 HP (29.4 kW) with one bank of hydraulics
Empty Weight	3,600 lb (1,630 kg)
Dimensions	185" (4.7 m) long x 84" (2.1 m) wide x 86" (2.2 m) tall (lowered), 91" (2.3 m) tall (raised)
Warranty	3 years
Optional Attachments	Conveyor Attachment (#86147) Conveyor Attachment Swivel (#86149) WideSpin Spinner Attachment (#86300)



Specifications subject to change without notice.